

Figure-8 Type Aerial Cable (2-144 F)

Multi Loose Tube Design
Suitable For Aerial Installation



Water blocked



Aerial



Outdoor

Applications

- Lashed aerial installation with rigorous load conditions, including heavy wind and ice
- Suitable for span length of 100 mtrs

Cable Construction

- Upto 144 enhance low water peak single mode fibers in full compliance with ITU-T-G.652.D
- Non-metallic and anti-buckling element FRP rod used as Central Strength Member.
- Water blocking yarns used helically over FRP Rod
- Loose buffer tubes fully filled
- Loose buffer tubes S-Z Stranded
- Water Blocking tape wrapping
- UV Stablized HDPE outer sheath, black
- High tensile, galvanised, stranded steel wire used as integrated messenger wire

Special Features

- Single layer stranded construction
- Dry core construction, i.e. ease of handling during the installation
- Offers exceptional strength and corrosion resistance for aerial application
- Integrated High tensile messenger for superior strength and corrosion resistance.
- Flexible buffer tubes provide easy fibre routing inside closure

Mechanical Characteristics

Temperature Range (IEC 60794-1-2-F1)

Laying and Installation	-10° to +70° C
Operation	-30° to +70° C
Transport and Storage	-30° to +70° C

Cable Bending Radius (IEC 60794-1-2-E11)

During Installation (Full Load)	20 x D, D = Cable D
Installed (No Load)	15 x D, D = Cable D
Repeated Bending (IEC 60794-1-2-E6)	30 Cycle, 20 X D, 10 Kg Load, D = Cable D

Tensile Force (IEC 60794-1-2-E1)

During Installation	5 W x 9.81 KN, where W = Weight of cable
Installed	2 W x 9.81 KN, where W = Weight of cable
Torsion Resistance (IEC 60794-1-2-E7)	10 Cycle (± 180°) 5 Kg Weight, L= 2 Mtr
Crush Resistance (IEC 60794-1-2-E3)	2000 N (100 X 100 mm) for 600 sec
Impact Resistance (IEC 60794-1-2-E4)	Height 500 mm, Weight = 3 Kg, 3 Nos
Kink Resistance (IEC 60794-1-2-E10)	20 x D, D = Cable D
Water Penetration (IEC 60794-1-2-F5)	1 Mtr Water Head, 3 Meter Cable Sample, 24 Hours

Variants*


*Cable can be supplied with singlemode (ITU-T G652, G655, G656, G657) & Multimode (50µ, 62.5µ & OM3) or combination of these

*Cable construction can be dry core or jelly filled

*Outer jacket can be of PVC, Nylon, LSZH, HDPE

*Strength member can be Steel or FRP

*These are general characteristics, customized designs are available as per requirements

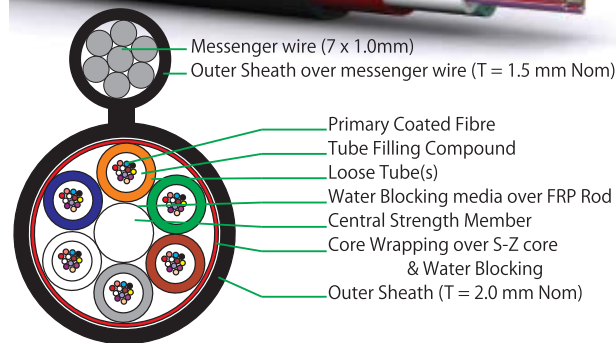

MULTI TUBE DESIGN

FIBRE COUNT	DIAMETER (mm) Nominal	WEIGHT (Kg./Km) Nominal	TENSILE STRENGTH (N)		BENDING RADIUS (mm)	
			Installation	Operating	Temporary	Permanent
UPTO 48F	10.5	150	4905	1962	20D	15D
UPTO 72F	11.5	175	4905	1962	20D	15D
UPTO 96F	13.0	200	4905	1962	20D	15D
UPTO 144F	16.0	265	4905	1962	20D	15D

Drum Length

2000/ 3000/ 4000 meters ± 5%

Cable Sheath Marking

Cable sheath shall be marked in white colour with hot foil indentation method. Marking details can be customized. Below mentioned details are generally marked on the cable sheath.

Telephone Symbol, Laser Symbol, Number of Fibres, Type of Fibre (G 652 D), Unarm, Month & Year of Manufacturing, Manufacturer's Name, Customer Name, Sequential Meter Marking & Drum Number

Cable Drum Packing

Every length will be delivered on non-returnable wooden drums. Generally the cable drum flange will be marked with following: These details can also be customised.

- Arrow showing rolling direction of the drum.
- Country of origin.
- Manufacturer's name/ Customised
- Number of fibers.
- Nominal cable length in meters
- Net and gross weight.
- Drum number
- Caution - Optical Fibre Cable Not to be Laid Flat
- Customer's name and destination

Both ends of the cable shall be sealed to prevent the ingress of moisture during transportation and storage, physical damage.